

E-tech P 259 three phase



Floor standing, heat only electric boiler.



- > Prepare for a carbon free future with electric
- > Quick installation with no flues required
- > Close load matching with four power stages controlled by stage delay timer
- > Robust stove enamelled casing
- > Easy to use controls interface – plug and play setup with pre-wired integrated control circuits
- > Low maintenance
- > Long life high grade incoloy 800 stainless steel heating element
- > An economical alternative to LPG and oil for off-grid locations
- > Ideal to be used as a temporary heat source or mobile heating
- > Suitable to connect to external storage cylinders to produce DHW

ACV UK Ltd

St. David's Drive, St. David's Business Park, Dalgety Bay, Fife, KY11 9PF
uk.sales@acv.com | acv.com

Technical data and dimensions




Name	UNIT	E-Tech P 259 three phase
Dimensions A	mm	1495
Dimensions B	mm	567
Dimensions C	mm	1100
Dimensions D	mm	183
Dimensions E	mm	542
Dimensions F	mm	125

Technical data

Name	UNIT	E-Tech P 259 three phase
Part number		00624501
Connection - heating	Ø"	DN100
Weight (empty)	kg	200
Max operating temperature	°C	90
Max service pressure heating (primary)	bar	4
Voltage	V	3x400
Capacity (total)	L	102
Electrical power (min/max)	kW	64.8 / 259.2
Number of heating elements		9
Heating element type		4 x 3 x 2.4 kW

Clearances	UNIT	(minimum)
Front	mm	500
Right side	mm	500

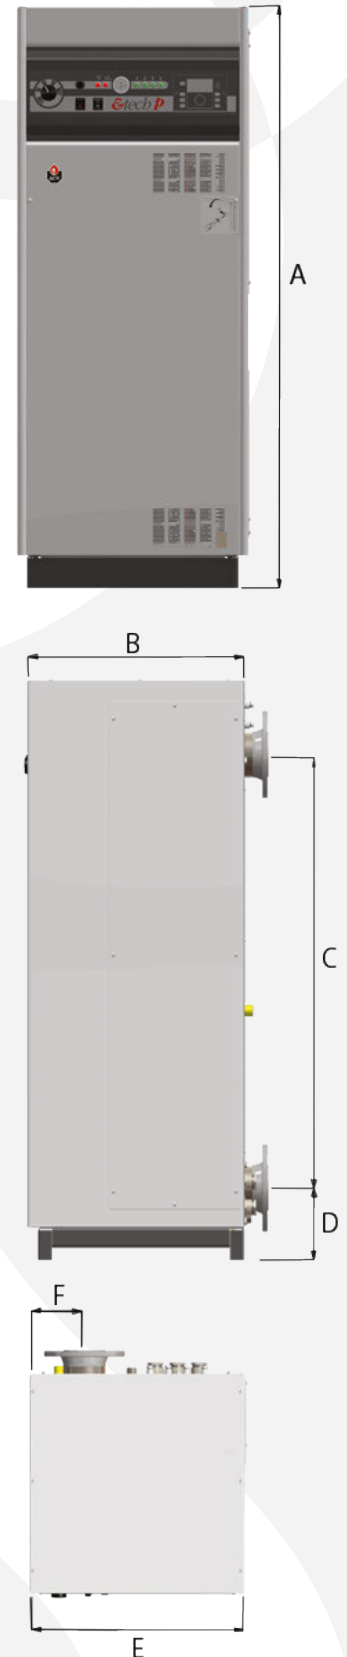

All dimensions in mm.