

Prestige 75 Solo

Wall hung gas fired condensing heat only boiler with stainless steel heat exchanger.



- > Easy to service and maintain with all components accessible from the front and flame inspection panel
- > Compact and lightweight
- > Integrated non return flue valve saves space above the boiler installation
- > Stainless steel heat exchanger for a long life, backed up by a 10-year heat exchanger warranty*
- > Close load matching for more efficient use with a 6:1 turndown ratio
- > Simple to operate with integrated ACVMax controls LCD that can operate two heating circuits or a four boiler cascade
- > Optional pipework kits and low loss headers available
- > Suitable for natural gas and LPG - supplied with LPG kit for easy on site conversion

ACV UK Ltd

St. David's Drive, St. David's Business Park, Dalgety Bay, Fife, KY11 9PF
uk.sales@acv.com | acv.com




*Terms & conditions available at www.acv.com/gb/customer/warranties.

Technical data and dimensions



TYPE	UNIT	Prestige 75 Solo
Part number		05629901
Fuel		Natural gas
Output power max (80/60°C)	kW	67.8
Output at 100% (50/30°C) G20	kW	73.8
Output power min (80/60°C) G20	kW	9.9
Voltage	V	230
Input max (heating) HCV	kW	77.59
Efficiency at 30% load (EN15502-1) – nett	%	108.5
Connection - heating	Ø"	1 ¼ M
Flue connection	Ømm	100/150
Connection gas	Ø"	¾ M
Water pressure drop boiler at Δt = 20°C	mbar	74
Gas flow rate (max output)	m³/h	7.3
Weight (empty)	kg	59
Max operating temperature	°C	87
Max service pressure heating (primary)	bar	4
Voltage	V	230
Standby loss ΔT 30K	W	70
Space heating energy efficiency class		A
Seasonal space heating efficiency	%	93
NOx class (EN15502)		6
NOx weighted (GCV) (EN15502)	mg/kWh	43.2
Sound power level indoors LWA	dB	59

Clearances	(minimum)
Top	300mm
Left side	25mm
Right side	25mm
Below	220mm

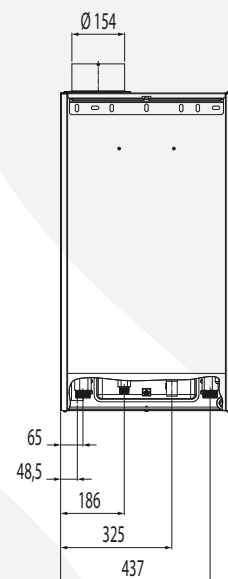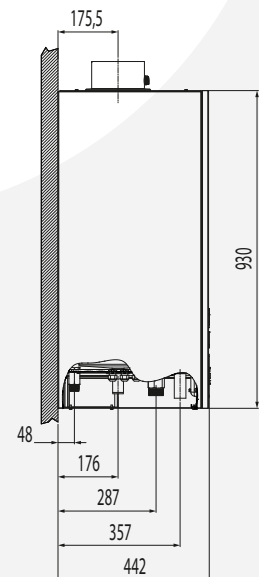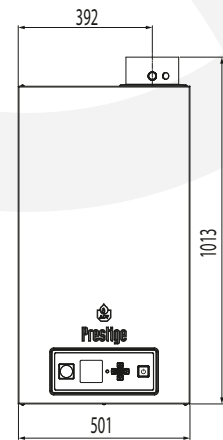

All dimensions in mm.